

INSTALLATION GUIDELINES

IKO METATECH DETAIL

These installation instructions have been produced according to the current technical standards. Any directives, standards, rules or national regulations, which are stricter than these installation instructions, must be respected.

In circumstances that defer from the above, please contact IKO.

DESCRIPTION

IKO metatech Detail is a fast-drying two-component liquid waterproofing system based on PMMA polymers. It is used to create a waterproof connection with complex details, such as flashings, domes, roof lights, chimneys, air-conditioning nozzles, gutters, etc.

ADVANTAGES

IKO metatech Detail has the following advantages:

- Seamless membrane
- Rapid, flame-free application
- Application possible under poor weather conditions
- Easy to use for precision work in difficult areas
- Viscous: does not run downwards if applied on vertical surfaces
- Compatible with IKO enertherm and other insulation materials

TECHNICAL SUPPORT

IKO assists its construction partners during all stages of the construction process, from the specifications, through the installation to the delivery of the project and after-care.


In terms of project follow-up, IKO provides technical expertise and advice, in the form of measurements, inspections and presence on site while work is conducted.

For technical assistance before, during or after your project, please contact the IKO project manager or technical support.

SYSTEM BUILD UP

Waterproofing system:

- 5** IKO metatech Detail
- 4** IKO polyester Fleece 110
- 3** IKO metatech Detail
- 2** Primer
- 1** Substrate

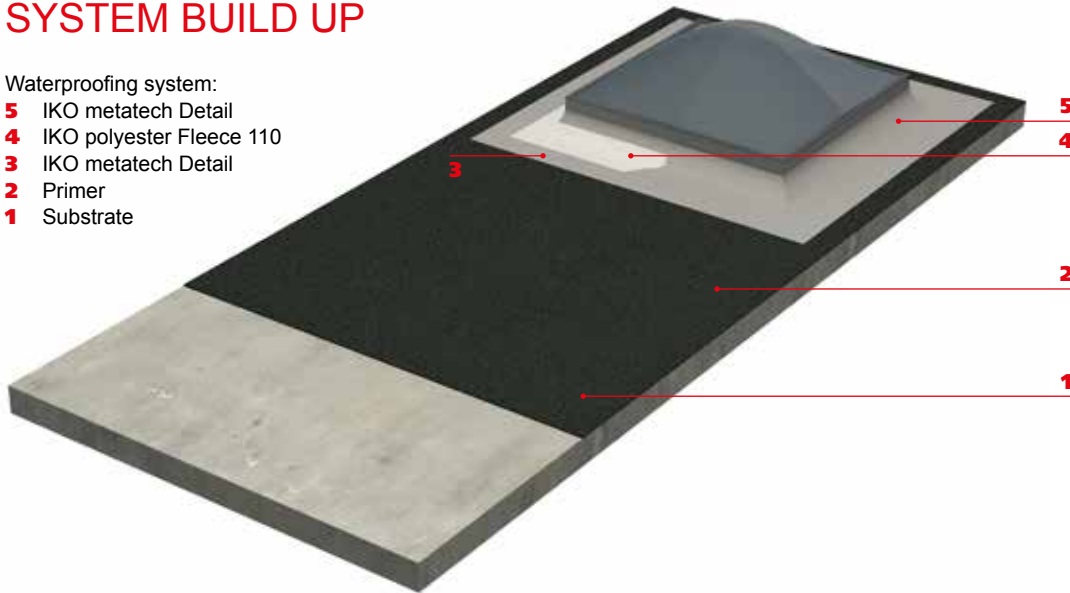

PREPARATION

1 - Working with IKO metatech Detail

IKO metatech products are fast-drying two-component resins based on PMMA. The first component is a liquid resin and the second (IKO perkadox) is a powder, which acts as a catalyst and causes a chemical reaction. The drying time of the resin depends on the catalyst dosage.

The catalyst dosage indicated in this document has been determined so that after 45 minutes you can walk over the applied layer. See Tables 1 and 2.

Table 1: IKO perkadox dosage for different PMMA IKO metatech products

Product	Substrate temperature in °C, IKO perkadox dosage as a mass %								
	+3	5	10	15	20	25	30	35	40
IKO metatech Bitumen Primer	5%	5%	5%	4%	3%	2%	2%	1%	1%
IKO metatech Porous Primer	6%	6%	6%	5%	5%	3%	3%	1%	1%
IKO metatech Detail	3%	3%	2%	2%	1%	1%	1%	1%	1%
IKO metatech Finish	3,5%	3,5%	3,5%	2,5%	2,5%	1,5%	1,5%	1%	1%

Table 2: Drying time for different PMMA IKO metatech products

Product	IKO perkadox dosage recommended at 20°C			
	Pot life	Resistance to rain	Can be walked upon	Curing
IKO metatech Bitumen Primer	± 10 min	± 20 min	± 30 min	± 1 h
IKO metatech Porous Primer	± 10 min	± 20 min	± 30 min	± 1 h
IKO metatech Detail	± 15 min	± 30 min	± 45 min	± 2 h
IKO metatech Finish	± 15 min	± 30 min	± 45 min	± 3 h

IKO perkadox should always be mixed with the resin in the same way:

- Before the use, first mix the resin using a double helix mixer at low speed.
- If desired, pour the required resin quantity into a clean bucket.
- Add the required quantity of IKO perkadox, while stirring and mixing the resin using a double helix mixer at low speed for 2 minutes.
- Make sure that everything is thoroughly mixed down to the bottom and sides of the bucket.

It is important to clean tools immediately after use with IKO metatech Cleaner.

IKO metatech products can be used:

- If the air, substrate temperature and resin temperatures are between the minimum and maximum level, as defined in Table 3.
- If the relative humidity level is lower than 85%.
- If it is not raining or foggy.
- On a dry surface, which is not frozen.
- On a surface that is not affected by rising damp (for example, water vapour from inside the building due to the absence of a vapour barrier or rising damp on a ground floor terrace due to the absence of a moisture barrier under the concrete.)

Table 3: Acceptable temperatures when using PMMA IKO metatech products

Product	Temperature in °C		
	Ambient	Substrate	Product
IKO metatech Bitumen Primer	+5°C - +35°C	+5°C - +40°C	+5°C - +30°C
IKO metatech Porous Primer	+5°C - +35°C	+5°C - +40°C	+5°C - +30°C
IKO metatech Detail	+5°C - +35°C	+5°C - +40°C	+5°C - +30°C
IKO metatech Finish	+5°C - +35°C	+5°C - +40°C	+5°C - +30°C

The temperature of the surface must be at least 3°C above the dew point during application and curing.

2 - Checking and preparing the substrate

IKO metatech Detail can only be applied to a substrate that is clean, dry and free of dust, as well as loose particles. The maximum moisture content of the substrate must measure 18% on the wood scale using a Protimeter or a maximum of 6% measured using a Tramex / Doser. IKO metatech Detail can be applied on zero falls flat roofs. Cracks, blisters, expansion joints and finishes on existing surface edges must be checked and, if necessary, repaired or replaced.

Table 4 shows the compatibility of IKO metatech Detail with various substrates, as well as the necessary preparation of these surfaces.

Please contact IKO for information about any surfaces that are not mentioned in this table.

Table 4: **Compatibility of IKO metatech Detail**

Substrate	Preparation	Primer	Comments
1 - Waterproofing membranes			
APP bitumen	Remove all loose particles (talc, sand, chips) using a stiff brush.	IKO metatech Bitumen Primer	The membrane must adhere sufficiently to the substrate. Any cracks and blisters must first be repaired. Adhesion to a sanded APP bitumen membrane must first be checked.
SBS bitumen	Remove all loose particles (chipping, aggregate) using a stiff brush.	IKO metatech Bitumen Primer	The membrane must adhere sufficiently to the substrate. Any cracks and blisters must first be repaired.
PVC			Please contact IKO.
EPDM			Please contact IKO.
Resitrix			Please contact IKO.
TPO			Please contact IKO.
TPE			Please contact IKO.
PIB			Not compatible
ECB			Not compatible
PE			Not compatible
2 - Cured liquid waterproofing			
1K PU	Clean the membrane.	None	
1K Hybrid			Not compatible
2K PMMA	Clean the membrane.	None	
3 - Insulation panels			
PIR/ PUR/ EPS/ PF	Prepare roofs by applying a self-adhesive carrier membrane (IKO base stick T/SA). Prepare accessible substrates subject to foot traffic, by applying a load dispersing panel made from fibre-reinforced cement.		Please contact IKO.
4 - Mineral surfaces			
Concrete and mortar	First abrade the waxed concrete.	IKO metatech Porous Primer	The substrate must have been in place for at least 28 days. Remove any laitance from the cement. It must have a compressive strength of at least 25 N/mm ² and a tensile strength of at least 1.5 N/mm ² .
Sound tiling	First abrade the surface.	IKO metatech Porous Primer	Remove any loose or damaged tiling and repair in order to obtain a sound surface (resin mortar reinforced with polypropylene fibres, new tiling). First dry out any pockets of water under the tiling.

Tabel 4: Compatibility of IKO metatech Detail

Substrate	Preparation	Primer	Comments
5 - Metals			
Ferrous metals (steel)	First sand the metallic surface in order to clean it. All rust must be removed from rusty surfaces. First clean using the IKO tech Cleaner solvent.		Please contact IKO.
Non-ferrous metals (aluminium, copper, lead, zinc)	First sand the metallic surface in order to clean it. All rust must be removed from rusty surfaces. First clean using the IKO tech Cleaner solvent.		Please contact IKO.
6 - Hard plastics			
PVC	First sand the surface in order to make it rough. First clean using the IKO tech Cleaner solvent.	None	
Polyester	First sand the surface in order to make it rough. First clean using the IKO tech Cleaner solvent.	None	
PE and PP			Not compatible
7 - Wood			
Treated wood		IKO metatech Porous Primer	Must first be treated for all outdoor applications. Chipboard panels must be water-resistant.
8 - Glass			
Mineral glass	Clean the surface thoroughly.	None	
Acrylic glass	Clean the surface thoroughly.	None	

2.1 - Applying the primer

Activate the primer (IKO metatech Porous Primer or IKO metatech Bitumen Primer), as described in the section “Working with PMMA IKO metatech products” with the correct dosage of IKO perkadox.

Apply the primer (IKO metatech Porous Primer or IKO metatech Bitumen Primer) with a brush or short nap roller, using 0.4 – 0.8 kg/m², depending on the nature of the substrate.

The primer must be dry before you move on to the next step.

2.2 - Repairing cracks and unevennesses in mineral surfaces

2.2.1 - 0,5 mm - 1 mm

Prepare the repair mortar: Before use, mix 10 kg of IKO metatech Floor L using a double helix mixer at low speed. Add 23 kg of IKO metatech Floor P and combine using a double helix mixer at low speed until there are no more lumps. Add 10 kg of IKO quartzsand 0.3-0.6 (0.3 - 0.6 mm) and combine using a double helix mixer at low speed until there are no more lumps. If desired, pour the required quantity of resin into a clean bucket. Add the required quantity of IKO perkadox, stir and combine using a double helix mixer at low speed for 2 minutes. Make sure that everything is thoroughly mixed down to the bottom and sides of the bucket.

Repair all cracks and unevennesses using this mixture.

2.2.2 - 1 mm -10 mm

Prepare the repair mortar: Before use, mix 10 kg of IKO metatech Floor L using a double helix mixer at low speed. Add 23 kg of IKO metatech Floor P and combine using a double helix mixer at low speed until there are no more lumps. Add 20 kg of IKO dorsilit 1mm (0.6 – 1.2mm) and combine using a double helix mixer at low speed until there are no more lumps. If desired, pour the required quantity of resin into a clean bucket. Add the required quantity of IKO perkadox, stir and combine using a double helix mixer at low speed for 2 minutes. Make sure that everything is thoroughly mixed down to the bottom and sides of the bucket.

Repair all cracks and unevennesses using this mixture.

2.2.3 - Over 10 mm

Any major damage should be repaired using the repair and levelling mortar IKO metatech Mortar. Before use, mix IKO metatech Mortar L using a double helix mixer at low speed. Add IKO metatech Mortar P and combine for 3 minutes using a double helix mixer at low speed until there are no more lumps. IKO metatech Mortar P already contains the required dose of IKO perkadox, so there is no need to add a catalyst. It is useful to transfer the contents to a clean bucket.

Repair all cracks and unevennesses using this mixture.

INSULATION (OPTIONAL)

Add a vapour barrier, if there is not already one present.

Fit IKO enertherm MG PIR insulation panels of the required thickness using IKO pro PU Adhesive, IKO pro Fix gun or IKO pro Sprayfast adhesive or mechanical fasteners.

Apply IKO base stick T/SA as a self-adhesive carrier membrane and remove any sand particles using a stiff brush.

APPLYING WATERPROOFING ON DETAIL CONNECTIONS

Mark out the surface needing to be treated with adhesive masking tape in order to obtain a good finish.

Activate IKO metatech Detail as described in the section “Working with PMMA IKO metatech products” with the correct dosage of IKO perkadox. Apply a first layer of IKO metatech Detail using 1.5 kg/m² with a brush or short nap roller. Place a piece of reinforcement fleece (IKO polyester Fleece 110 made from 110 g/m² polyester) on the wet coating, press the fleece into the first layer using a roller and make sure that the fleece is fully saturated with IKO metatech Detail. There must not be any air bubbles between the first layer and the reinforcement fleece. Make sure that you leave a 5 cm overlap on the edges of the reinforcement fleece. Immediately apply a second layer of IKO metatech Detail using 1.5 kg/m² with a brush or short nap roller according to the wet on wet method.

Remove the self-adhesive tape within 10 minutes of applying the product.

When working on bituminous membranes with a slate chippings finish, it is possible to sprinkle slate chippings in the liquid waterproofing while it is still wet, in order to obtain a continuous visual effect.

DETAILED TECHNICAL DRAWINGS

Please contact IKO.

MAINTENANCE

The durability of the waterproofing can be guaranteed, provided:

- The waterproofing is not subject to ponding water for an extended period.
- The surfaces are regularly maintained according to the current regulations.
- The waterproofing is used for its initially intended purpose.

Compliance with the following maintenance instructions determines the life span of the waterproofing system.

Maintenance begins as soon as the work is accepted. It consists of regular inspections and at least one annual visit, which must be conducted before the end of autumn.

Maintenance tasks include:

- Keeping the (rain) water drainage system in a good state of repair.
- Regular removal of grass, moss and vegetation.
- Removal of fallen leaves at the end of autumn.
- Keeping the small accessories (flashings, joints) and large structures (drain profiles, plinths, gutters, etc.) in a good state.
- Repair of any cracks detected.

Advice for use:

- Do not attach anything to the treated surface.
- Do not pour any aggressive products onto the surface, even if they are emptied directly into the drains.
- Do not make any changes without consulting an IKO specialist.

IKO PRODUCTS USED IN THIS SYSTEM

- IKO flexia:**
- IKO metatech Bitumen Primer
 - IKO metatech Cleaner
 - IKO metatech Porous Primer
 - IKO metatech Detail
 - IKO metatech Finish
 - IKO perkadox
 - IKO polyester Fleece 110

- IKO roofing:**
- IKO base Stick T/SA

- IKO enertherm:**
- IKO enertherm MG

- IKO pro:**
- IKO pro Fix gun
 - IKO pro PU Adhesive
 - IKO pro Sprayfast

The technical information regarding the application of liquid waterproofing products supplied by IKO is provided in good faith on the basis of IKO's current know-how and experience, and assumes that these products will be used in accordance with the above-mentioned recommendations, under normal circumstances, and that these products were stored and handled in the correct manner. The above-mentioned information is only intended to inform the user about the various properties and/or recommendations and can in no way be considered as a guarantee with regard to the merchantability and suitability for a specific purpose in view of the continuously changing environmental factors, including the specific conditions at the building site, the use of different materials and substrates, etc. As a result, and with the exception of binding legal stipulations to the contrary, IKO cannot be held liable on the basis of the provided information, and any other written recommendations and/or advice. Please contact IKO if you have any doubts regarding the processing, the end use or the application of these products. Users are recommended to consult the most recent edition of the technical data sheet. A copy of this will be provided upon request or can be obtained from www.ikoflexia.com